

USER'S MANUAL

MC425BA

BLUETOOTH® | 3" (76 mm) WEATHER RATED SPEAKERS WITH BUILT-IN AMPLIFIER

BOSS®
AUDIO SYSTEMS

BOSS Audio Systems
3451 Lunar Court • Oxnard, CA 93030

www.bosssaudio.com

800-999-1236 US Toll-free

805-751-4853 Customer Service

Tech Support: www.bosssaudio.com/support/technical-support



0218

iPod® and iPhone® are trademarks of Apple, Inc., registered in the U.S. and other countries. BOSS Audio Systems is not affiliated with Apple, Inc.
The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by BOSS Audio Systems is under license.
Other trademarks and trade names are those of their respective owners.

USER'S MANUAL

MC425BA

BLUETOOTH® | 3" (76 mm) WEATHER RATED
SPEAKERS WITH BUILT-IN AMPLIFIER



BOSS®
AUDIO SYSTEMS

REBEL
POWER SPORTS

MC425BA Motorcycle/UTV Amplified Speaker System

NOTES

MC425BA Motorcycle/UTV Amplified Speaker System

Congratulations on your purchase of a BOSS Audio Systems Off-Road amplified speaker system. It has been designed, engineered and manufactured to bring you the highest level of performance and quality, for years of listening pleasure.

Thank you for making BOSS AUDIO SYSTEMS your choice for entertainment!



MC425BA Motorcycle/UTV Amplified Speaker System

Contents

High-Performance, Weatherproof Speakers	2 PCS
Mounting Hardware	2 PCS
Rubber Mounting Shims	4 PCS
Fuse	1 PC
User's manual	1 PC

Features:

RCA & 3.5mm Audio Inputs

Speaker Clamp Mounts

Weatherproof Volume Control

High-Impact, High Temp Speaker Enclosures

Weatherproof Speakers

Bluetooth Audio Streaming

MC425BA Motorcycle/UTV Amplified Speaker System

Specifications

Operation Voltage	10 ~ 16 V
Max Power	600 W
THD	<0.1%
S/N	>75 dB
Channel Separation	>50 dB
Frequency Response	20 Hz-20 KHz
Sensitivity	Max 820 mv
Speaker Wires	4.9'
Volume Control Wire	5.9'
Audio Input Cable	5.9'
Power Cable	8.2'
Bracket Size Range	0.75" ~1.25"
Fuse Rating	1 A

MC425BA Motorcycle/UTV Amplified Speaker System

Installation

1. Screw the brackets to the bottom of the speakers.
2. Find a safe, ideal mounting location and fit the brackets over the chosen mounting bars.
3. Fasten the mounting screws after you review the safety of the mounting location.

Wiring

1. Be sure to run the wiring securely and far away from any moving components.
2. Connecting the power cable to the power source: You will need to connect the 12V red wire to a (fused 2A) switched power source.
3. Use the 3.5mm stereo jack to connect to your entertainment source(MP3 player, etc).
4. Use your player device and wired remote volume controller to control your level of loudness.

Bluetooth

To pair and connect your Bluetooth device to the MC425BA
Enter Settings > Bluetooth Menu > Search > "MC425BA"
>If Prompted to enter a passcode enter : "0000"


MC425BA Motorcycle/UTV Amplified Speaker System

Amplifier and Loudspeaker Mounting

Install Reminder

The components and wiring should not be installed around any moving parts, keep away from ignition parts, fuel lines, or any hot exhaust

Speakers should not be installed where they might inhibit safety features on the vehicle (i.e. lights, horns, brake levers, etc...)

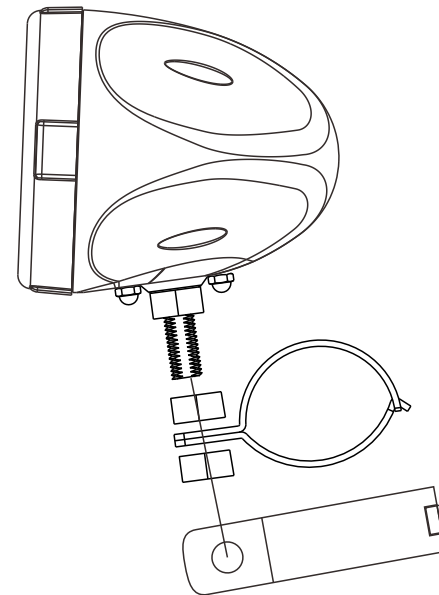

12 VDC SPDT Relay
(Single Pole Double Throw)
NOT INCLUDED, SOLD SEPARATLY

