




CADENCE

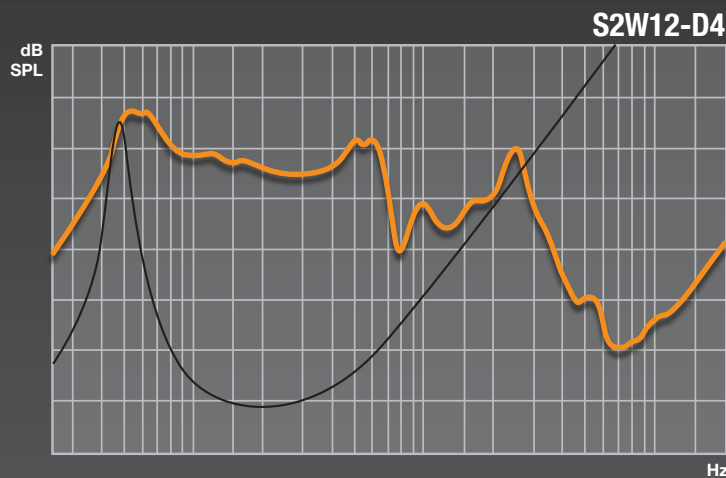

2 / 4 Ohm
1200 Watts **12 in**

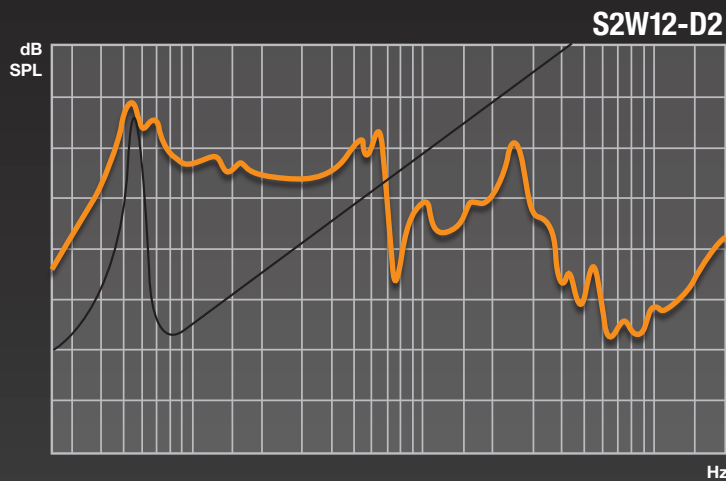

Freq Resp Phase

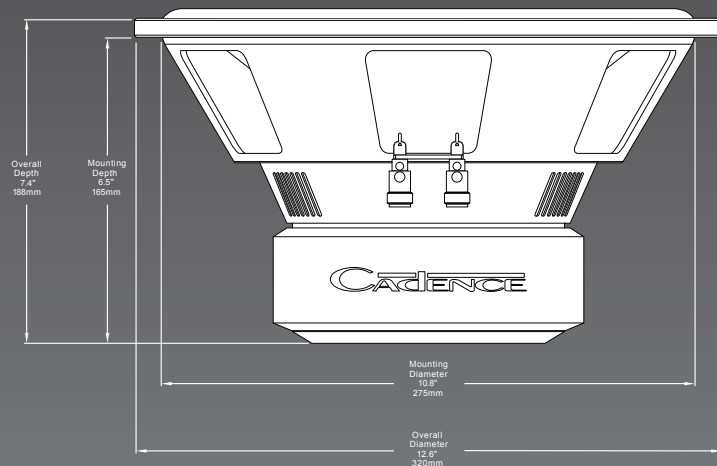

TS PARAMETERS

S2W12-D2

FO: 45.188 Hz
QMS: 9.722
QES: 1.080
QTS: 0.572
ERM: 0.611
CMS: 62.590 $\mu\text{M/N}$
MMS: 210 gr
MMD: 183.219 gr
NO: 0.198%
BL: 9.307 T/M
SPL: 92 dB
VAS: 22.463 L
RE: 1.6 Ohm
SD: 502.730 cm
XMAX: 24.5

S2W12-D4

FO: 38.848 Hz
QMS: 4.505
QES: 0.560
QTS: 0.498
ERM: 0.0
CMS: 167.457 $\mu\text{M/N}$
MMS: 100.230 gr
MMD: 96.416 gr
NO: .300%
BL: 8.869 T/M
SPL: 93 dB
VAS: 29.629 L
RE: 3.6 Ohm
SD: 352.990 cm
XMAX: 24.5

SPECIFICATIONS


Application: Subwoofer

Basket Type: Rolled Steel
Cone: Kevlar Reinforced Ultra-Stiff Paper Composite
Dust Cap: Woven Fiberglass
Surround Style: High Excursion Double Laminated Foam
Structure Weight: 6.13 lbs
2" Dual 2 or 4 ohm ASV Voice Coil

Impedance: 2 or 4 ohm
RMS / Peak Watts: 600 / 1200
Frequency Response: 20 Hz - 500 Hz
SPL @ 1w/1m: 92 dB (2 ohm) / 93dB (4 ohm)

ENCLOSURE STYLE:

VENTED (1.5cu ft)	SIZE H x W x L
Enclosure Dim.	16" x 16" x 14" (406.4 x 406.4 x 355.6)
Slot Port	14.5" x 1.5" x 10" (368.3 x 38.1 x 254)
Circular Port	4" x 8" (101.6 x 203.2)
System Gain	+3.65 dB/55 Hz
F-3	37 Hz
Tuning Frequency	45 Hz
SEALED (1.5cu ft)	SIZE H x W x L
Enclosure Dim.	16" x 16" x 14" (406.4 x 406.4 x 355.6)
F-3	55 Hz

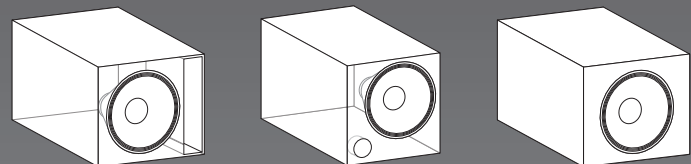

Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731
800.477.2328 • 732.370.5400 • fax: 732.370.5553
cadence@cadencesound.com • www.cadencesound.com

