




# CADENCE

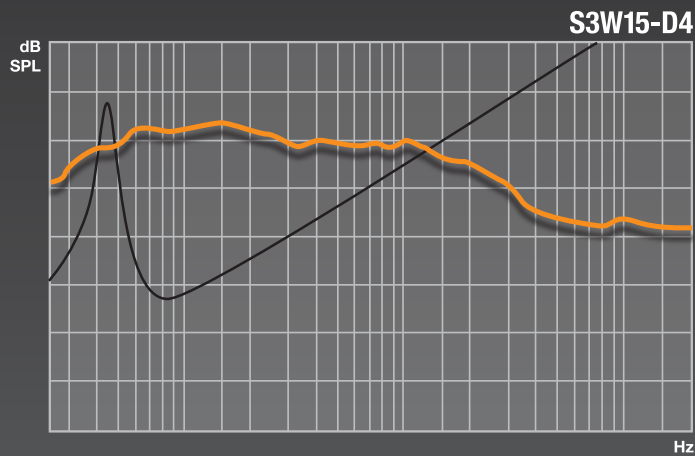

2 / 4 Ohm  
3000 Watts **15 in**

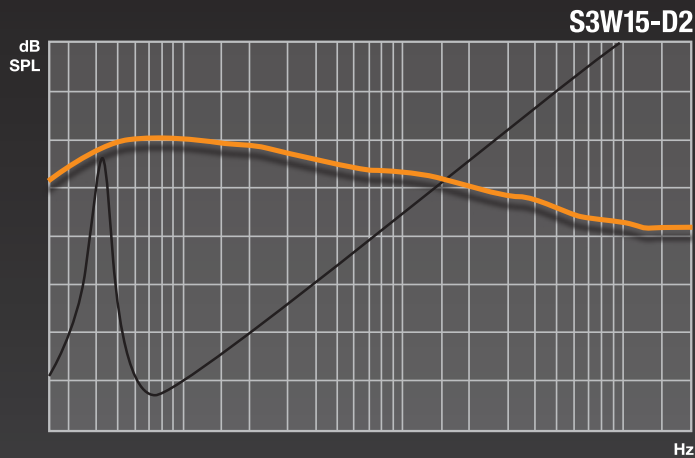

Freq Resp Phase

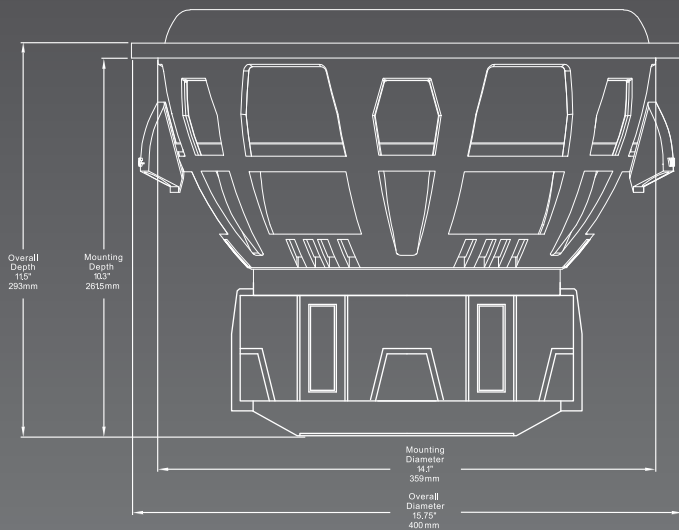

## TS PARAMETERS

### S3W15-D2

REVC: 1 Ohm  
FO: 35.465 Hz  
SD: 881.410 Sq Cm  
MD: 120.000 g  
BL: 12.428 T/M  
QMS: 7.568  
QES: 0.467

QTS: 0.440  
No: 0.571%  
SPL: 95 dB  
VAS: 61.772 Ltr  
CMS: 55.995u M/N  
MMS: 359.668 g  
MMD: 344.622 g

### S3W15-D4

REVC: 6.4 Ohm  
FO: 37.237 Hz  
SD: 88.140K mm  
MD: 130.500 g  
BL: 33.872 T/M  
QMS: 8.359  
QES: 0.574

QTS: 0.537  
No: 0.398%  
SPL: 96 dB  
VAS: 1.167 ft  
CMS: 41.511u M/N  
MMS: 440.077 g  
MMD: 425.031 g

## SPECIFICATIONS


Application: Subwoofer

Basket Type: Cast Aluminium  
Cone: Ultra Stiff Woven Carbon Fiber Glass  
Dust Cap: Woven Carbon Fiber Glass  
Surround Style: High Density Double Laminated Foam  
Structure Weight: 6.13 lbs  
3" Dual 2 or 4 ohm Flat Wire Voice Coil

Impedance: 2 or 4 ohm  
RMS / Peak Watts: 1500 / 3000  
Frequency Response: 20 Hz - 500 Hz  
SPL @ 1w/1m: 95 dB (2 ohm) / 96dB (4 ohm)

### ENCLOSURE STYLE:

VENTED (2.75cu ft)	SIZE H x W x L
Enclosure Dim.	18" x 18" x 19" (457.2 x 457.2 x 482.6)
Slot Port	2" x 16" x 10" (50.8 x 406.4 x 254)
Circular Port	4" x 3" (101.6 x 76.2)
System Gain	+/- 10 Hz
F-3	40 Hz
Tuning Frequency	45 Hz
SEALED (1.5cu ft)	SIZE H x W x L
Enclosure Dim.	16.5" x 16.5" x 18.5" (419.1 x 419.1 x 470)
F-3	35 Hz

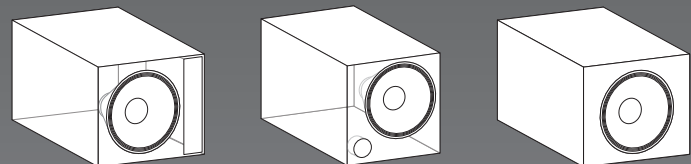

## Cadence Acoustics

6519 Highway 9 North • Howell, NJ 07731  
800.477.2328 • 732.370.5400 • fax: 732.370.5553  
cadence@cadencesound.com • www.cadencesound.com

