

IK S8-SVC2



IMPACT

K-SERIES

SHALLOW 200MM / 8INCH
1x2Ω SUBWOOFER
FOR COMPACT ENCLOSURES




Screw: M6
Thread depth: 15 mm



- Chassis with particularly low installation depth – optimized for compact and shallow enclosure constructions
- 1 x 2 Ohms single voice coil
- Magnet system with threaded hole on the back – allows screwing to the back panel of the enclosure for stabilization and reduction of enclosure vibrations
- Extremely stiff sandwich paper cone
- Long-excursion rubber surround for highest mechanical rating
- Rugged magnet cover with HELIX lettering for perfect magnet protection
- Enclosure connection terminal, grille and gasket included in delivery

Dimensions

Abmessungen

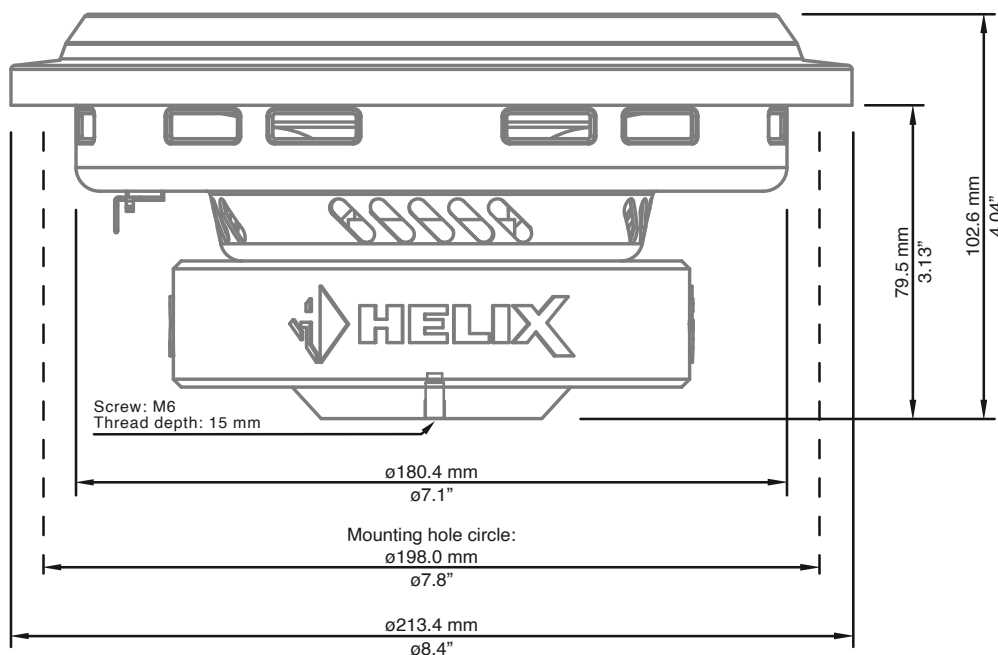

Technical data

Technische Daten

Power Leistung	RMS Max.	300 W 600 W
Impedance Impedanz	Z	1 x 2 Ω
DC resistance Gleichstromwiderstand	Re	2,0 Ω
Resonance frequency Resonanzfrequenz	Fs	43 Hz
Mechanical Q factor Mechanische Güte	Qms	7,79
Electrical Q factor Elektrische Güte	Qes	0,53
Total Q factor Gesamtgüte	Qts	0,50
Compliance Nachgiebigkeit	Cms	170 μm/N
Equivalent air volume Äquivalentvolumen	Vas	11 L
Force factor Kraftfaktor	B*I	9,1 Tm
Sensitivity Wirkungsgrad	SPL	91,0 dB @ 2,83V 85,0 dB @ 1W / 1m
Cone area Membranfläche	Sd	222 cm²
Moving mass Bewegte Masse	Mms	81 g
Mechanical resistance Mechanischer Widerstand	Rms	2,8 kg/s
Voice coil diameter Schwingspulendurchmesser	Ø	50,8 mm
Voice coil winding height Schwingspulenwickelbreite		19 mm
Max. linear excursion Max. linearer Membranhub	Xmax	+/- 6 mm

Enclosure recommendations

Gehäuseempfehlungen

Sealed box

Geschlossenes Gehäuse

Net volume Nettovolumen	10 L
Lower limiting frequency (-3dB) Untere Grenzfrequenz (-3 dB)	46 Hz
Recommended DSP settings Empfohlene DSP-Einstellungen	Highpass: "Self-Define" 46 Hz / Q = 1,5; EQ Filter: 100 Hz / Q = 1,0 / -2,5 dB

Vented box

Bassreflex-Gehäuse

Net volume Nettovolumen	10 L
Port diameter Reflex-Kanaldurchmesser	Ø 60 mm
Port area Reflex-Kanallfläche	28 cm²
Port length Reflex-Kanallänge	42 cm (angled port)
Port tuning frequency Tunnelabstimmungsfrequenz	Fb 39 Hz
Lower limiting frequency (-3dB) Untere Grenzfrequenz (-3 dB)	45 Hz
Recommended DSP settings Empfohlene DSP-Einstellungen	Highpass: "Self-Define" 40 Hz / Q = 1,2; EQ Filter: 100 Hz / Q = 0,9 / -2,0 dB

Wiring configuration

Anschluss

1 x 2 Ω configuration on one amplifier channel

1 x 2 Ω Konfiguration an einem Verstärkerkanal

